



Polyamide cable glands with metric threads for use with increased safety Ex e enclosure.


TECHNICAL DATA

Material	Polyamide
IP rating	IP68
Temperature range	-35°C ... +95°C
Certificate	LCIE 07ATEX6082X
Marking	Ex eb IIC Ex tb IIIC
Gasket	Included
Threads	Metric - PG and NPT on request
Accessories	Lock nut, Gasket

Product code		Thread Ø M	Clamping range	E	L	H	Packing	Lock nut to order separately
Ex e (noir)	Ex i (bleu)							
TRCG12M16099	TRCG12M16095	M16	5.0 - 8.0	10	37	19	50	TRCG32M16000
TRCG12M16119	TRCG12M16115	M16	5.0 - 10.0	10	39	22	50	TRCG32M16000
TRCG12M20139	TRCG12M20135	M20	7.0 - 12.0	10	40	24	50	TRCG32M20000
TRCG12M20169	TRCG12M20165	M20	10.0 - 14.0	10	43	27	50	TRCG32M20000
TRCG12M25169	TRCG12M25165	M25	10.0 - 14.0	10	45	27	50	TRCG32M25000
TRCG12M25219	TRCG12M25215	M25	12.0 - 18.0	10	49	33	20	TRCG32M25000
TRCG12M32009	TRCG12M32005	M32	16.0 - 25.0	10	52	42	20	TRCG32M32000
TRCG12M40009	TRCG12M40005	M40	22.0 - 32.0	10	62	53	10	TRCG32M40009
TRCG12M50009	TRCG12M50005	M50	28.0 - 38.5	12	67	60	5	TRCG32M50009
TRCG12M63009	TRCG12M63005	M63	40.0 - 48.0	12	68	70	5	TRCG32M63009

H = SW = Key size tool

Dimensions (mm)

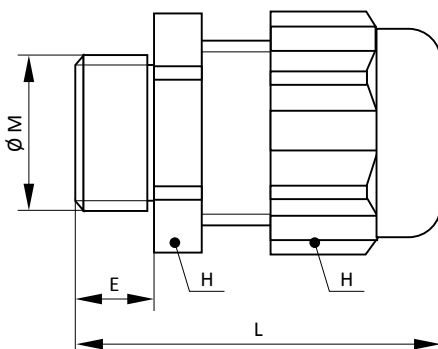



Polyamide plugs with metric threads for use with increased safety Ex e enclosure.

TECHNICAL DATA

Material	Polyamide
IP rating	IP68
Temperature range	-35°C to +90°C
Certificate	LCIE 03ATEX0033U
Marking	Ex eb IIC Ex tb IIIC
Gasket	Included
Threads	Metric - PG and NPT on request
Accessories	Lock nut, Gasket

Product code (Colour black)	Thread Ø M	E	L	H	Packing Pieces	Lock nut to order separately
TRCG22M16009	M16	8	12.0	20	50	TRCG32M16000
TRCG22M20009	M20	9	13.0	26	50	TRCG32M20000
TRCG22M25009	M25	10	15.0	32	25	TRCG32M25000
TRCG22M32009	M32	11	16.5	40	15	TRCG32M32000
TRCG22M40009	M40	12	18.0	48	10	TRCG32M40009
TRCG22M50009	M50	13	21.0	55	10	TRCG32M50009
TRCG22M63009	M63	15	24.5	70	10	TRCG32M63009

H = SW = Key size tool

Dimensions

