



Polyamide cable glands with metric threads for use with increased safety Ex e enclosure.


TECHNICAL DATA

| | |
|--------------------------|---|
| Material | Polyamide |
| IP rating | IP68 |
| Temperature range | -35°C ... +95°C |
| Certificate | LCIE 07ATEX6082X |
| Marking | Ex e (black colour) or Ex i (blue colour) |
| Gasket | Included |
| Threads | Metric - PG and NPT on request |
| Accessories | Lock nut, Gasket |

| Product code | | Thread Ø M | Clamping range | E | L | H | Packing | Lock nut to order separately |
|--------------|--------------|------------|----------------|----|----|----|---------|------------------------------|
| Ex e (noir) | Ex i (bleu) | | | | | | | |
| TRCG12M16099 | TRCG12M16095 | M16 | 5.0 - 8.0 | 10 | 37 | 19 | 50 | TRCG32M16000 |
| TRCG12M16119 | TRCG12M16115 | M16 | 5.0 - 10.0 | 10 | 39 | 22 | 50 | TRCG32M16000 |
| TRCG12M20139 | TRCG12M20135 | M20 | 7.0 - 12.0 | 10 | 40 | 24 | 50 | TRCG32M20000 |
| TRCG12M20169 | TRCG12M20165 | M20 | 10.0 - 14.0 | 10 | 43 | 27 | 50 | TRCG32M20000 |
| TRCG12M25169 | TRCG12M25165 | M25 | 10.0 - 14.0 | 10 | 45 | 27 | 50 | TRCG32M25000 |
| TRCG12M25219 | TRCG12M25215 | M25 | 12.0 - 18.0 | 10 | 49 | 33 | 20 | TRCG32M25000 |
| TRCG12M32009 | TRCG12M32005 | M32 | 16.0 - 25.0 | 10 | 52 | 42 | 20 | TRCG32M32000 |
| TRCG12M40009 | TRCG12M40005 | M40 | 22.0 - 32.0 | 10 | 62 | 53 | 10 | TRCG32M40009 |
| TRCG12M50009 | TRCG12M50005 | M50 | 28.0 - 38.5 | 12 | 67 | 60 | 5 | TRCG32M50009 |
| TRCG12M63009 | TRCG12M63005 | M63 | 40.0 - 48.0 | 12 | 68 | 70 | 5 | TRCG32M63009 |

H = SW = Key size tool

Dimensions (mm)

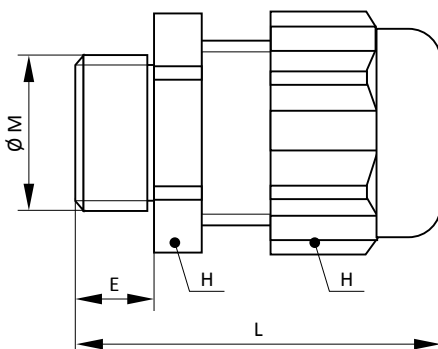



Polyamide plugs with metric threads for use with increased safety Ex e enclosure.

TECHNICAL DATA

| | |
|--------------------------|--------------------------------|
| Material | Polyamide |
| IP rating | IP68 |
| Temperature range | -35°C to +90°C |
| Certificate | LCIE 03ATEX0033U |
| Marking | Ex e |
| Gasket | Included |
| Threads | Metric - PG and NPT on request |
| Accessories | Lock nut, Gasket |

| Product code (Colour black) | Thread Ø M | E | L | H | Packing Pieces | Lock nut to order separately |
|--------------------------------|------------|----|------|----|-------------------|---------------------------------|
| TRCG22M16009 | M16 | 8 | 12.0 | 20 | 50 | TRCG32M16000 |
| TRCG22M20009 | M20 | 9 | 13.0 | 26 | 50 | TRCG32M20000 |
| TRCG22M25009 | M25 | 10 | 15.0 | 32 | 25 | TRCG32M25000 |
| TRCG22M32009 | M32 | 11 | 16.5 | 40 | 15 | TRCG32M32000 |
| TRCG22M40009 | M40 | 12 | 18.0 | 48 | 10 | TRCG32M40009 |
| TRCG22M50009 | M50 | 13 | 21.0 | 55 | 10 | TRCG32M50009 |
| TRCG22M63009 | M63 | 15 | 24.5 | 70 | 10 | TRCG32M63009 |

H = SW = Key size tool

Dimensions

